MODEL L-90 DIAGRAM WITH HINGED TOP GUIDES - PRIMARY CABINET DIMENSIONS

SPECIFICATIONS (CENTIMETERS ARE REPRESENTED BY [])


MAX TV SIZE: 90"+

MAX WEIGHT CAPACITY: 200 LBS [90.7 KG] MAX TRAVEL (EXTENSION): 50" [127] LIFT SYSTEM HEIGHT: 33.125" [84.1]

MAX TV HEIGHT: 48.5" [123.2] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER) TV DIMENSIONS: W____, H____, D____ MIN. INTERIOR CABINET WIDTH : W+2" [5.1] = _____ OR 34" [86.4] MIN. INTERIOR CABINET HEIGHT: H+2.5" [6.4] = _____ OR 33.125" [84.1] MIN. INTERIOR CABINET DEPTH MIN. LID CUTOUT DEPTH: D+10.25" [26] = _____

PLATFORM HEIGHT: INTERIOR CABINET HEIGHT MINUS 33.125" [84.1]

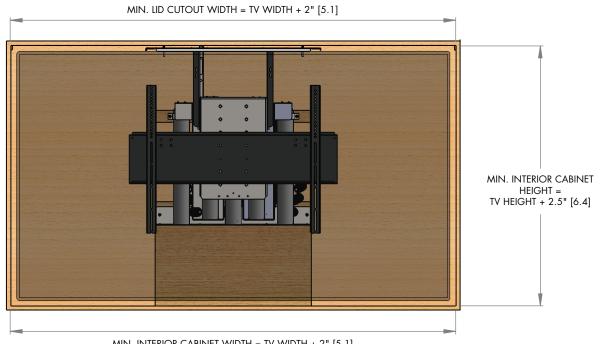


MIN. INTERIOR CABINET WIDTH = TV WIDTH + 2" [5.1]

NOTES:

- 1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
- 2. WHEN DETERMINING TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "TV WITHOUT STAND" HEIGHT
- 3. LIFT MECHANISM IS POWDERCOATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY
- 4. LIFT ENCLOSURE'S REAR PANEL SHOULD BE CONSTRUCTED TO WITHSTAND A LOAD OF 600 LBS [272.2 kg] OR MORE


IMPORTANT HINGED LID INFORMATION

- 1. HINGED LIDS REQUIRE THE USE OF THE "HINGED TOP GUIDE" ACCESSORY
- 2. HINGES FOR THE LID ARE NOT PROVIDED BY NEXUS 21
- 3. SEE PAGE 2 OF THIS DRAWING FOR MORE DETAILED INFORMATION ABOUT THE HINGED LID

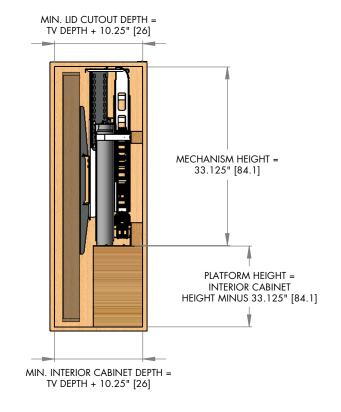



MODEL L-90 DIAGRAM WITH HINGED TOP GUIDES - CABINET REFERENCE DIMENSIONS

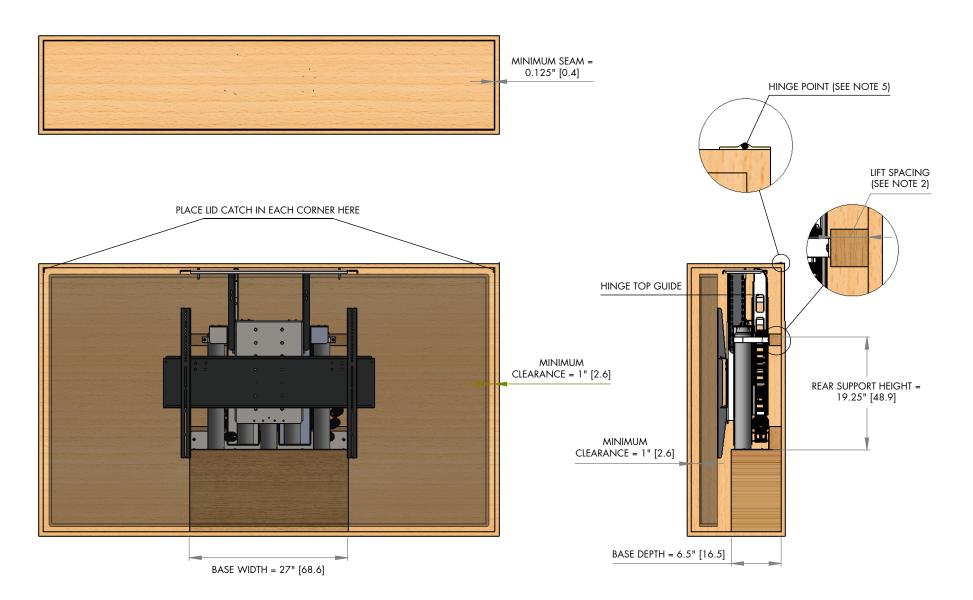

NOTES:

- 1. TOP SUPPORT BRACKETS ALLOW THE HINGED TOP GUIDES TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
- 2. LIFT SYSTEM MUST BE SPACED A MINIMUM OF 2" [5.1] AWAY FROM THE HINGE POINT REGARDLESS OF CABINET DEPTH
- 3. LID MUST HAVE A LID CATCH TO REST ON IN ORDER TO ENSURE IT STAYS FLUSH WITH THE SURROUNDING CABINET OR COUNTERTOP
- 4. MINIMUM SEAM CAN BE REDUCED TO 0.0625" [0.2] WITH A 45 DEGREE BEVEL ON THE LID
- 5. PIANO HINGE SHOWN FOR REFERENCE; HOWEVER, OTHER HINGE TYPES CAN BE USED

