# **Beamforming Microphone Array 2**



ClearOne's second-generation Beamforming
Mic Array is the professional-grade microphone
array with beamforming and adaptive steering,
ClearOne's next-generation Acoustic Echo
Cancellation and Noise Cancellation.

The ultra-sleek design fits into any conferencing environment and delivers the clearest audio pickup available with its Acoustic Intelligence.

## **2<sup>nd</sup> Generation Mic Array**

- Beamforming & adaptive steering technology— Think of it as smart beam selection
- + Most advanced AEC & NC
- + Acoustic Intelligence with adaptive ambience
- + Replaces 9 to 12 traditional microphones

## Ultra Sleek Design

- + Three mounting options Ceiling, Wall & Table
- + Two power options: P-link, PoE
- + Standard ceiling projector mount

## Flexible & Scalable

- + Daisy-chain up to 3 arrays per CONVERGE® Pro 2 unit
- + Zero-consumption of CONVERGE Pro 2 analog inputs
- + Single cable for power, audio & control
- + Daisy-chain with DIALOG® 20 Wireless Mic System

## **Configuration & Management**

- + New CONVERGE Pro 2 CONSOLE software
- + Auto-discovery of devices
- + System monitoring and troubleshooting





Houses of Worship





## **Rear Connections**






# **Connection Diagrams**





## **Operating Modes**

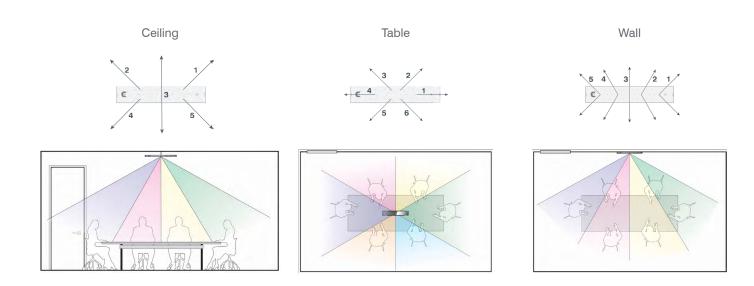



#### PRODUCT SPECIFICATIONS

#### **AUDIO**

24 microphones

1 Channel In (does not take up any input channels in CONVERGE Pro 2)

Number of Beams:

5 in Ceiling mode

6 in Table mode

5 in Wall mode

Polar Pattern: Custom

Frequency Response: 150Hz – 16kHz, +/- 3dB Dynamic Range: 150Hz – 16kHz, >70dB

#### **LED & TOUCH SENSOR**

Sensor Type: 2 Capacitive Touch Button for Mute LED (2x: one on each end of a unit):

- Power On
  - » Power On & Unmuted: Blue
  - » Muted: Red
- · Power Off: No light

#### **BEAMFORMING MIC ARRAY 2 CONFIGURATION**

Beam enable/disable

Mounting mode selection:

- Auto
- Ceiling
- Wall
- Table

Acoustic Echo Cancellation (AEC) on/off Noise Cancellation (NC) on/off

Filters:

- All Pass
- Low Pass
- High Pass
- NotchPEQ

Automatic Level Control (ALC) on/off

Gain adjust

Mute on/off

Auto gate/Manual gate

#### USB

For future use

#### P-LINK PERIPHERAL BUS

P-Link In & Out: Proprietary Peripheral Bus

Ports Type: RJ-45

Cable

Solid core 24AWG, factory terminated Cat 5e or Cat 6 Distance: Up to 200 feet

Daisy Chain:

- Up to 3 Beamforming Microphone Array 2 units with each supported CONVERGE Pro 2 unit in the same chain
- Up to 3 Beamforming Microphone Array 2 units and up to 3 DIALOG 20 Wireless Receiver units with each supported CONVERGE Pro 2 unit in the same chain
- Up to 6 Beamforming Microphone Array 2 units in the same chain with 2 supported CONVERGE Pro 2 units connected through C-Link

#### POWER SELECTION SWITCH

Sensor Type: Slide Switch

- · Toggle toward P-Link to power device by P-Link
- Toggle toward PoE to power device by PoE Injector or PoE Ethernet Switch

#### **CONFIGURATION & ADMINISTRATION SOFTWARE**

CONVERGE Pro 2 CONSOLE Software

#### **COMMANDS**

Through supported CONVERGE Pro 2 unit connected through P-Link

#### **MOUNTING**

Ceiling mount kit (12", 24", 36", and 48" suspension column)

Wall mount kit

Table mount

#### **POWER & THERMAL**

Power Type: PoE

Port Type: RJ-45

Power Source: P-Link or PoE Injector

PoE In: PoE IEEE 802.3at

Power Source Indicator: Set the position of the power

source to indicate the source of the power (P-Link or PoE)

Mains Voltage: 100-240VAC, 50/60Hz AC Power Consumption: 12W Typical DC Power Consumption: 5.26W Typical

Thermal: 40.95 BTU/Hr Operating Temperature:

14° F/-10° C to 104° F/40° C ambient temperature

## DIMENSION & WEIGHT (WxHxD)

30" x 1" x 5.75" (762mm x 25.4mm x 146mm)

Unit Weight: 4.4 lbs (2.0kg)

Shipping Weight: 5.7 lbs (2.59kg)

#### PART NUMBERS

910-3200-201: White Beamforming Microphone Array 2 910-3200-201-B: Black Beamforming Microphone Array 2

### SUPPORTED CONVERGE PRO 2

Product
CONVERGE Pro 2 128
CONVERGE Pro 2 128D
CONVERGE Pro 2 128T
CONVERGE Pro 2 128TD
CONVERGE Pro 2 128V
CONVERGE Pro 2 128VD
CONVERGE Pro 2 48T
CONVERGE Pro 2 120

#### ACCESSORIES

ACCESSORIES		
Part Number	Product	
910-3200-202	PoE Power supply kit for BFM	
910-3200-203-12	BFM2 Ceiling Mount kit with 12" Suspension Column - White	
910-3200-203-12-B	BFM2 Ceiling Mount kit with 12" Suspension Column - Black	
910-3200-203-24	BFM2 Ceiling Mount kit with 24" Suspension Column - White	
910-3200-203-24-B	BFM2 Ceiling Mount kit with 24" Suspension Column - Black	
910-3200-203-36	BFM2 Ceiling Mount kit with 36" Suspension Column - White	
910-3200-203-36-B	BFM2 Ceiling Mount kit with 36" Suspension Column -Black	
910-3200-203-48	BFM2 Ceiling Mount kit with 48" Suspension Column - White	
910-3200-203-48-B	BFM2 Ceiling Mount kit with 48" Suspension Column - Black	
910-3200-203	BFM2 Ceiling Mount kit without Suspension column - White	
910-3200-203-B	BFM2 Ceiling Mount kit without Suspension column - Black	
910-001-005-12	BFM White Ceiling Mount kit with 12" suspension column	
910-001-005-12-B	BFM Black Ceiling Mount kit with 12" suspension column	
910-001-005-24	BFM White Ceiling Mount kit with 24" suspension column	
910-001-005-24-B	BFM Black Ceiling Mount kit with 24" suspension column	
910-001-005-36	BFM White Ceiling Mount kit with 36" suspension column	
910-001-005-48	BFM White Ceiling Mount kit with 48" suspension column	
910-001-006	BFM White Wall Mount kit	
910-001-006-B	BFM Black Wall Mount kit	
910-3200-204-50	50 Ft RJ45 CAT6 Cable	
910-3200-204-100	100 Ft RJ45 CAT6 Cable	
910-3200-204-150	150 Ft RJ45 CAT6 Cable	
910-3200-204-200	200 Ft RJ45 CAT6 Cable	

### **SALES AND INQUIRIES**

North America

Tel: +1 801.975.7200 TollFree: +1 800.945.7730

TechSales: +1 800.705.2103 Fax: +1 801.303.5711

sales@clearone.com

Europe

Tel: +1.800.945.7730 global@clearone.com Middle East

Tel: +1.800.945.7730 global@clearone.com Asia Pacific

Tel: +1.800.945.7730 global@clearone.com Other Regions

Tel: +1.800.945.7730 global@clearone.com

Other product names may be registered trademarks of their respective owners who do not necessarily endorse ClearOne or ClearOne's products. All rights reserved. Information in this document subject to change without notice. 802-000-100-31 Revision 1.7 © 2017 ClearOne.